


Typical Applications


- Incinerated Municipal Solid Waste Ash (Bottom + fly ash)

Infeed material: Ash minus 16 mm, moisture content 20% maximum

TRAJECTORY WITH TRADITIONAL PLATES

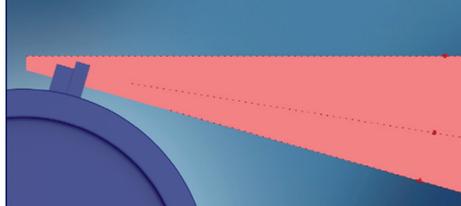


TRAJECTORY WITH SGM PLATES

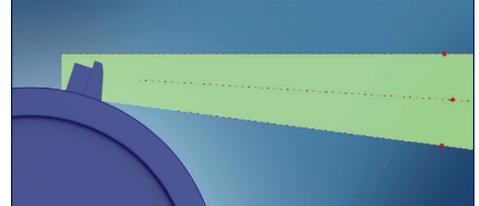

Smart Ballistic Separator

Model SBS

Patent application N° 102014902238219



Technical Specifications

The purpose of the SGM Smart Ballistic Separator (SBS) is to facilitate the recovery of solid pieces of metals from moist ash (typically around 20%) by concentrating the metals into a fraction that is about 50% less in mass and a third in moisture content making the subsequent ferrous and eddy current metal separation much easier and better performing.

The SBS consists in a high-speed rotating drum provided with hitting plates around its circumference that catapult the particles as they are encountered during their free fall to the drum. The larger the mass of a particle, the longer the trajectory it takes when thrown by the SBS.

The SBS separates the infeed Incinerator Ash into a short throw fines fraction (minus approximately 5/64") where moisture is concentrated and a large long throw fraction mainly made of solid pieces including the metals.

The launch performed by the ballistic separator is not an immediate impact launch, but a centrifugal launch, with particles leaving the hitting plates from their tips.

A centrifugal launch means that particles encounter the hitting plates on their upper part, leave the hitting plates earlier than particles encountering the hitting plates on their lower part. This delay results in different particles leaving the hitting plates in different moments with the hitting plates in different positions which has an impact on the ballistic trajectory of the particles.

The special design of the hitting plates of the SGM Smart Ballistic Separator reduces the spectrum of the flow of particles leaving the separator, making a more accurate separation based on the different masses of the particles.

MODEL	DRUM WIDTH	CAPACITY
SBS 60	60"	30 t/h
SBS 80	80"	40 t/h

Product Highlights

Smart Ballistic Separator has adjustments that influence the trajectories which can assist in optimizing the separation. These adjustments are:

- Position between the loading belt and drum (adjustment through a hydraulic actuator)
- Height of the layer that falls on the drum (adjustment through a hydraulic actuator)
- Speed of the drum



MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
SBS 60	104"	76"	122"	8,818 lbs
SBS 80	104"	76"	141"	10,360 lbs

Difference between the standard and SGM plates

Standard hitting plates



SGM hitting plates

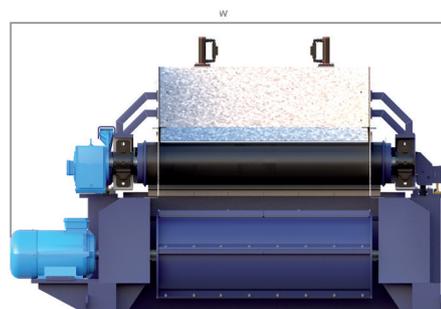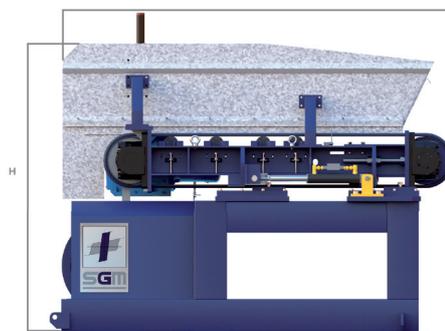

SGM Magnetics Corporation
Separation and Recycling

4521 19th Street Court East, Suite 101, Bradenton, FL 34203
866.693.4815 www.sgmagnetics.com info@sgmmagnets.com

